

BIOROCK® Sewage Treatment



Non-Electric



Low running costs



Completely silent



Odourless



Small footprint




BIOROCK
sewage water treatment

BIOROCK®



Non-Electric Sewage Treatment Plants for domestic waste water

BIOROCK was established in 1988 and is now an internationally acclaimed and experienced company and industry leading in compact wastewater treatment technology. BIOROCK systems have already been installed worldwide in the past 25 years. Our proven performance leads to trust of both the users of our technology and our supplier's network, which is the basis of our success.

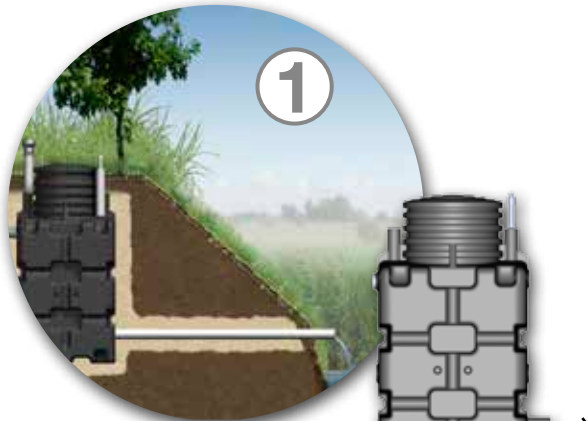

Most suitable for sloped sites discharging direct to a watercourse* or drainage field.

The BIOROCK® Non-Electric treatment process

Initially the raw sewage (A) enters a primary tank (PT, B) to provide separation and the breakdown of organic solids (Primary Treatment). The sewage then passes through an effluent filter before discharging into the BIOROCK® unit which incorporates the well proven aerobic digestion process (Secondary Treatment) and filtration process (Tertiary Treatment).

BIOROCK uses a material with huge surface area which allows colonization of the necessary bacteria, a process which is essential for the effective treatment of domestic wastewater.

The BIOROCK media is highly resistant to degradation and remains extremely stable over the long term - our 25 years' experience in the industry being proof of this.


- Very Stable Inorganic material - does not break down over time, unlike "organic" media
- Requires little maintenance – scraping and scarification is not necessary, unlike for organic media
- The Structure and Composition ensures unsurpassed and unique surface treatment with exceptional purification results
- Ecological material, locally produced and recyclable

BIOROCK offers a much more efficient and ecological wastewater treatment technique compared to traditional techniques that are very high in maintenance and energy consumption.

BIOROCK offers 2 discharge options :

1. BIOROCK gravity discharge
2. BIOROCK high-level discharge

Our high level discharge system is equipped with a reliable, high-quality pump kit. This kit is delivered "pre-assembled" for ease and speed of installation.

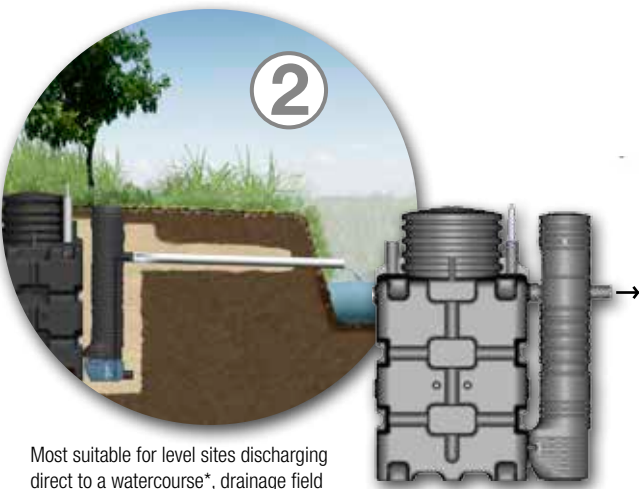


Most suitable for level sites discharging direct to a watercourse*, drainage field or raised bed.

*subject to local or national regulations.

Installation for all type of ground conditions and applications.

- High ground-water sites.
- Reinforced and durable, the BIOROCK units and Primary tanks are reinforced as standard enabling them to be structurally sound in all ground conditions.
- The BIOROCK System has the ability to handle intermittent (seasonal) wastewater loadings, even during long absence periods
- Holiday Homes, Campsites, Caravan Parks, etc.
- The system can also handle low utilization levels without compromising the treated effluent quality.



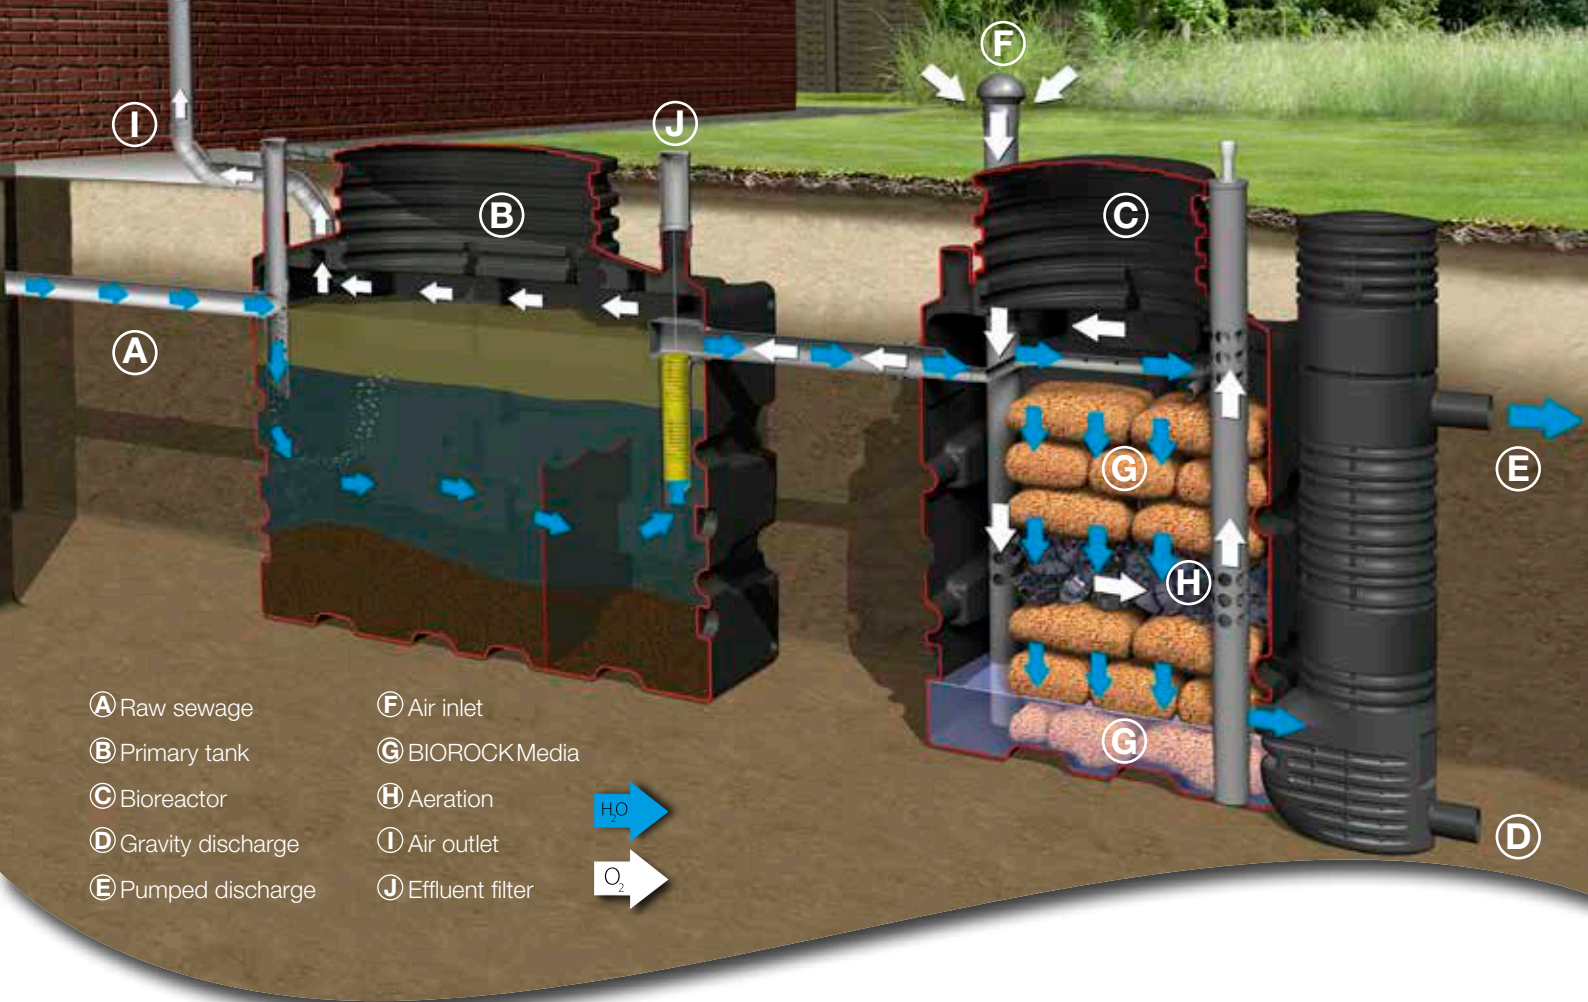

Unique advantages

BIOROCK provides a revolutionary, efficient and reliable compact wastewater treatment solution. Very compact, our systems are free from any blower or air diffusers. They don't need any electricity for the treatment process, leading to minimal maintenance and repair costs, the lowest operational costs and the longest desludge intervals.

These unique advantages lead to significant costs savings for the user compared to conventional wastewater treatment plants, as the reliability of the system is maximized with no possible breakdowns thus no need for expensive spare parts. The superb purification results produced by BIOROCK have placed our systems in a leading position when compared with older & traditional wastewater treatment techniques.

Revolutionary technology

- ✓ Septic tank replacement / upgrade
- ✓ Non-Electric sewage treatment process
- ✓ 24 Hour start-up period
- ✓ Long absence periods acceptable

Unique advantages

- ✓ Completely silent
- ✓ Low operational costs
- ✓ Very light maintenance
- ✓ Long desludge interval

Sustainability

- ✓ Superb effluent quality
- ✓ Low carbon footprint
- ✓ Ecological material, locally produced and recyclable


The BIOROCK® systems are delivered 'complete' and pre-assembled for ease of installation.

FACTS


TRADITIONAL VERSUS BIOROCK

	Traditional units	BIOROCK
Non-Electric purification process	NO	YES
Silent & Odourless	NO	YES
Handles Intermittent Loading	NO	YES
Handles absence periods	NO	YES
Handles most household cleaners	NO	YES
Handles power failure	NO	YES
Septic tank conversion unit*	NO	YES
Intensive maintenance	YES	NO
High sludge production	YES	NO
High operational costs	YES	NO


The BIOROCK® range of sewage treatment plants




ECOROCK-1500



ECOROCK-2000



ECOROCK-3000

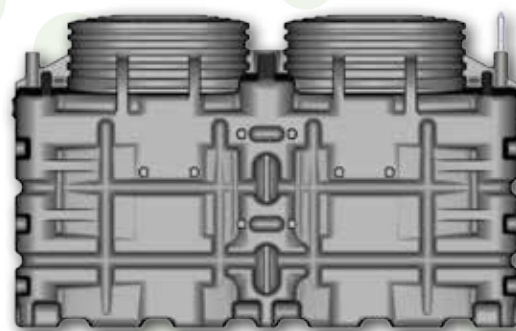

ECOROCK-5000

	ECOROCK-1500	ECOROCK-2000	ECOROCK-3000	ECOROCK-5000
Capacity in P.E.	4/6 p.e.*	10 p.e.*	15 p.e.*	30 p.e.*
Capacity in litres/day	600/900	1500	2250	3750
Material	HDPE	HDPE	HDPE	HDPE
Length	1150 mm	1450 mm	2150 mm	3550 mm
Width	1150 mm	1150 mm	1150 mm	1150 mm
Height unit (max.)	2100 mm	2100 mm	2100 mm	2175 mm
Weight (empty)	186 kg	223 kg	297 kg	625 kg
Δ in- & outlet pipe	1098 mm	1098 mm	1098 mm	1213 mm


Purification results BIOROCK®

Tested conform EU Norm EN 12566-3 + A2		
BOD ₅	4 mg/l	99%
COD ₅	26 mg/l	96%
S.S.	3 mg/l	99%

More results are available upon request

*The capacity of the individual ECOROCK-5000 unit can be increased if the required effluent quality is of a lower standard than the results, achieved during the EN-12566-3 Performance test. "

Options BIOROCK




Extension set ø 700 x 1200 mm




Extension set ø 400 mm




Mechanical fan ø 110 mm

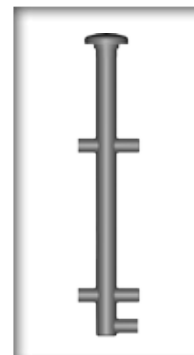

Sampling pipe ø 160 mm

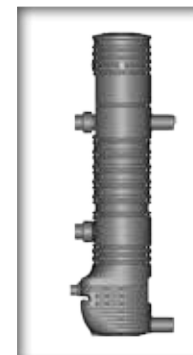

Pumping well ø 400 mm



Extension set ø 700 mm



Effluent filter for primary tank



Clips for above ground installations

Our support

- A brand with strong values
- Access to licensed products
- Daily support by our team of professionals
- Excellent hands-on trainings
- Warranty: 25 years on tanks / 10 years on BIOROCK media*

*subject to conditions, contact us for details



BIOROCK S.à.r.l. | Z.A.E. Robert Steichen | 5, rue Bommel
L-4940 Hautcharage | Luxembourg | www.biorock.com

